


Locking sleeve acc. to
DIN 16283
G1/2" x G1/2" LH
AF 27

G1/2"
ISO 228

Welded pipe connection acc. to
DIN 16282, Form 6, G1/2" LH

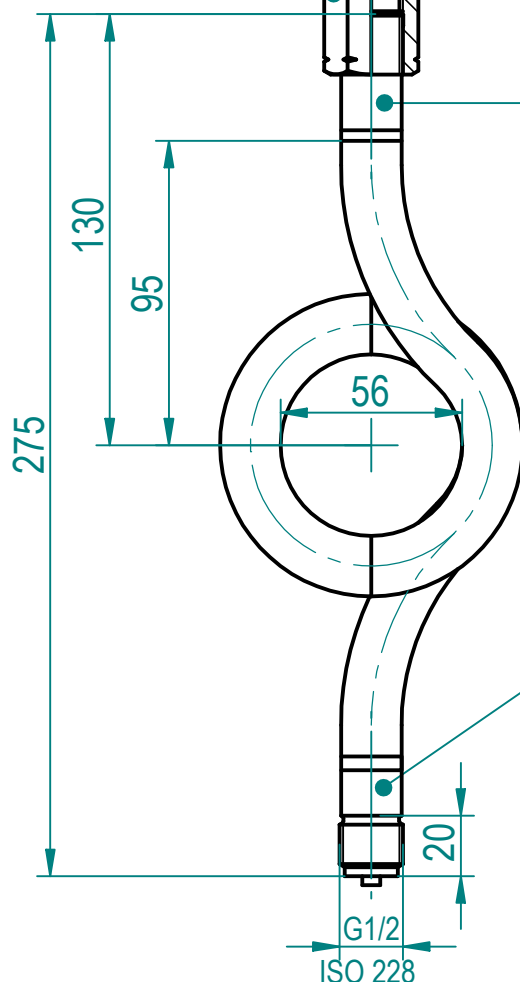

Welded pipe connection acc. to
DIN 16282, Form 4, G1/2"
Male thread acc. to
DIN EN 837-1

Operating pressure:
- max. 160 bar / 120 °C*
- max. 120 bar / 300 °C*
- max. 100 bar / 400 °C*


*temperature in front of the
siphon

Length tolerances caused of bending ~ ± 5 mm

Subject to change.

Manometer accessories

Tolerances according to
DIN ISO 2678 part 1 & 2

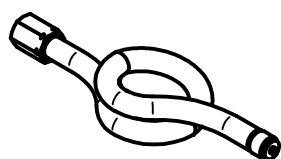

Date

Name

Scale

Material

03.01.2017

Nanko

1:2

316Ti

Fig. 96 Siphon circular DIN 16282, form C
G1/2"